ADDENDUM NUMBER 1

JUNEAU PARK Site # 772 801 North Lincoln Memorial Drive Milwaukee, WI

Project Number: P192-11621

and BRADFORD BEACH
Site #753
2400 North Lincoln M

Site #753 2400 North Lincoln Memorial Drive Milwaukee, WI Project Number: P192-11612

Notice Number: 6887

Date of Addendum: March 28, 2014

This Addendum to the Contract Documents is issued to modify, explain or correct the original documents, dated February 3, 2014, and is hereby made part of the Contract Documents. Acknowledge receipt of this Addendum in the space provided on the Bid Form, or bid may be rejected.

BIDDING DOCUMENTS

Section 01500 - Temporary Facilities and Controls

Add to Article 1.10 – Traffic Regulations as follows:

South bound traffic on Lincoln Memorial Drive can be reduced to one lane between the hours of 9:00 AM to 7:00 PM on weekdays. Traffic control and use of lanes on Prospect Ave shall be coordinated with the City of Milwaukee.

Add to Article 1.14 - Barriers as follows:

Contractor shall place barricades with "Closed" signs on all trails/pedestrian paths at the construction site. "Closed Ahead" signage and barricades shall be installed on the trails/pedestrian paths leadibng to the construction site in advance at a point designated by the Owner. The bike trail along Lincoln Memorial Drive shall be cleaned, restored to a useable condition and reopened at the end of each work day.

Soil Boring Information

The soil borings for the Juneau Park site are attached. Boring 1 was taken at the top of the bluff and Boring 2 at the bottom of the bluff. (Total of 5 sheets)


Drawings

Clarify Stone Step Detail on sheet C902 as follows:

Step shall be lime stone with rock faced edges and tread surface to be thermal finished walking surface. Color should be buff or gray as approved by the engineer in the field. The 6-inch dimension on the detail refers to the minimum aggregate base thickness. Stone steps shall be sized to provide a 4" minimum overlap, and 12" of exposed tread. Thickness of steps is 7-inches. The landing stone shall consist of one large stone or several smaller tightly fitted stones at the contractors option. Landing stone shall not be smaller in size than step stones. Surface finish to match steps.

Railings shall be thickness SCH. 40. Galvanization shall be ASTM A-123 G-120 hot dipped galvanized after fabrication.

End of Addendum No. 1

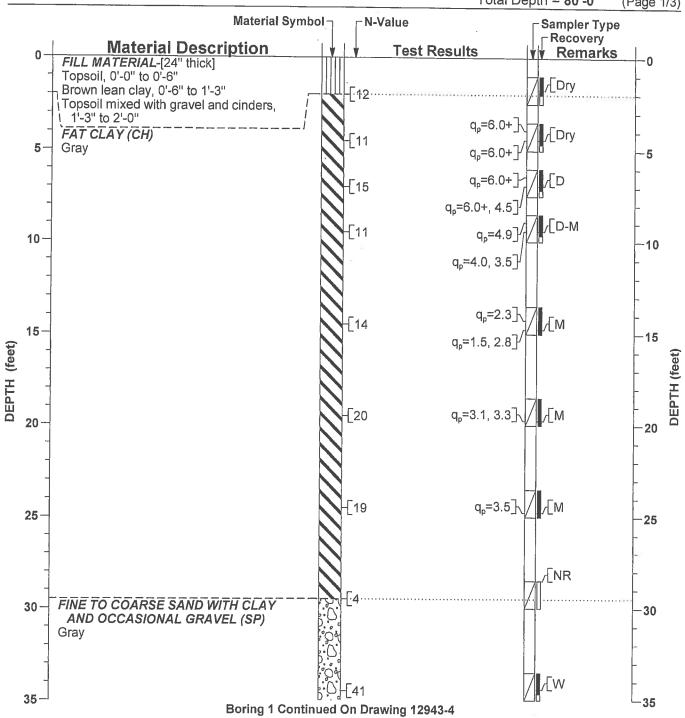

For Notes and Legend, see Drawing 12943-2.


Soils & Engineering Services, Inc.

1102 STEWART STREET ● MADISON, WISCONSIN Phone: 608-274-7600 ● 888-866-SOIL (7645) Fax: 608-275-7511 ● Email: soils@soils.ws

CONSULTING CIVIL ENGINEERS SINCE 1966

SOIL BORING RECORD



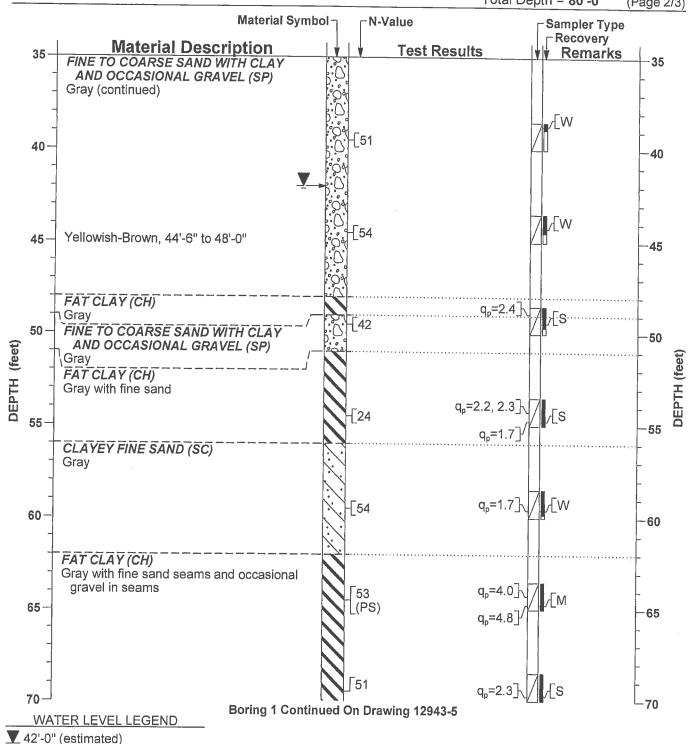



Soils & Engineering Services, Inc.

1102 STEWART STREET • MADISON, WISCONSIN Phone: 608-274-7600 • 888-866-SOIL (7645) Fax: 608-275-7511 • Email: soils@soils.ws

CONSULTING CIVIL ENGINEERS SINCE 1966

SOIL BORING RECORD



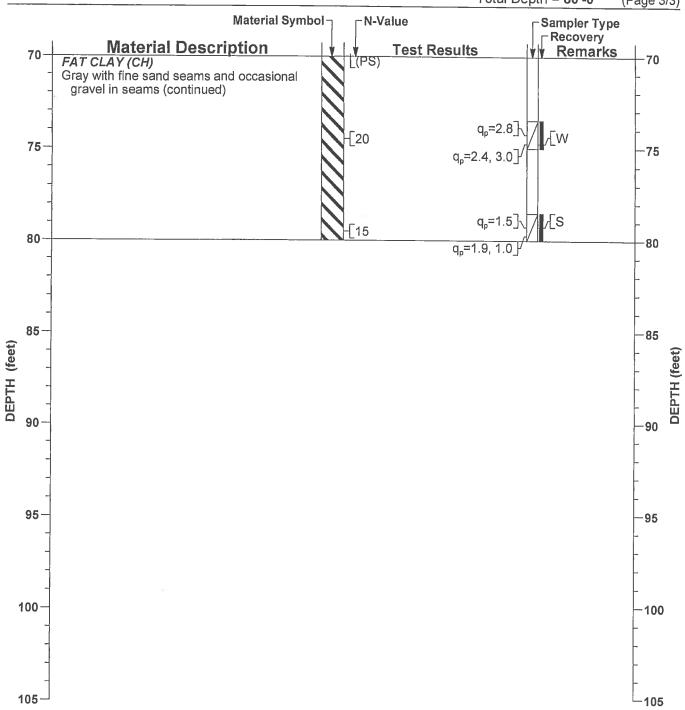

For Notes and Legend, see Drawing 12943-2.


Soils & Engineering Services, Inc.

1102 STEWART STREET • MADISON, WISCONSIN Phone: 608-274-7600 • 888-866-SOIL (7645) Fax: 608-275-7511 • Email: solls@soils.ws

CONSULTING CIVIL ENGINEERS SINCE 1966

SOIL BORING RECORD



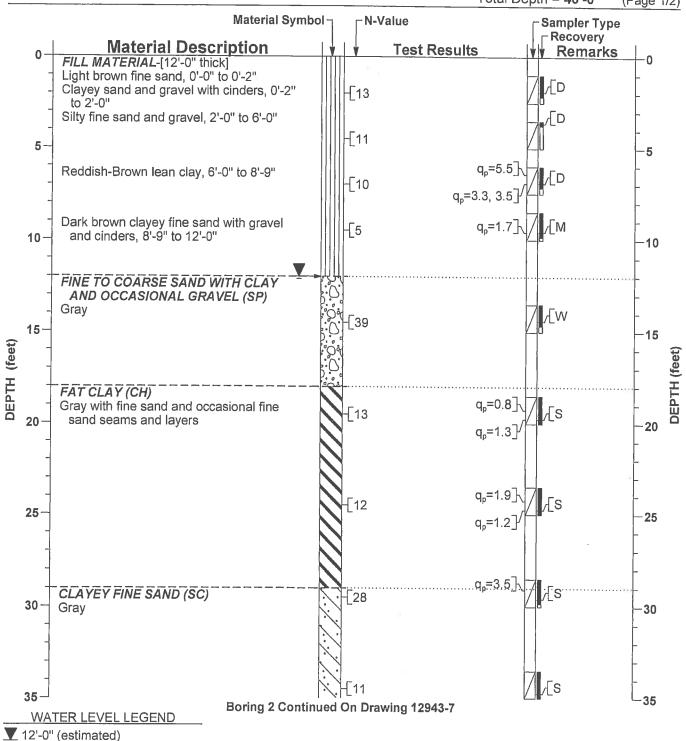



Soils & Engineering Services, Inc.

1102 STEWART STREET . MADISON, WISCONSIN Phone: 608-274-7600 • 888-866-SOIL (7645) Fax: 608-275-7511 • Email: soils@soils.ws

CONSULTING CIVIL ENGINEERS SINCE 1966

SOIL BORING RECORD



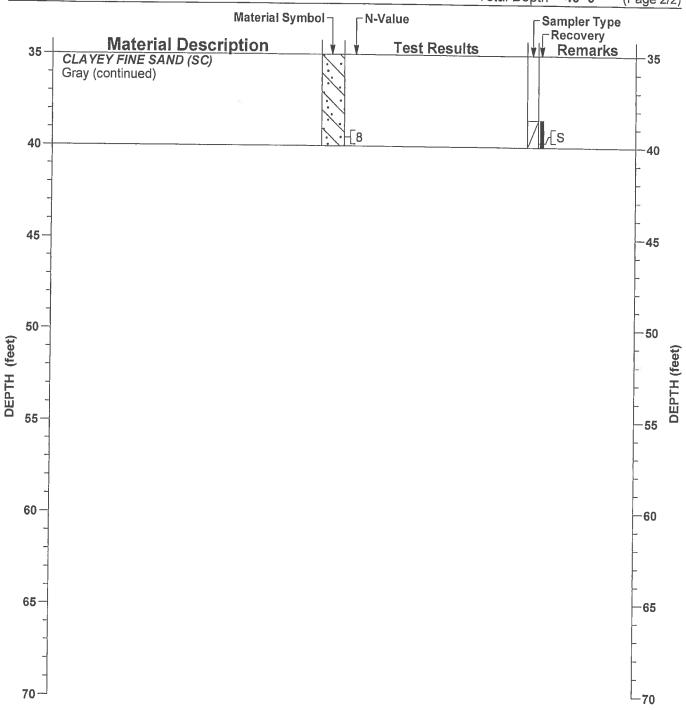

For Notes and Legend, see Drawing 12943-2.

Soils & Engineering Services, Inc.

1102 STEWART STREET • MADISON, WISCONSIN Phone: 608-274-7600 • 888-866-SOIL (7645) Fax: 608-275-7511 • Email: soils@soils.ws

CONSULTING CIVIL ENGINEERS SINCE 1966

SOIL BORING RECORD

